





Copper
Polished



Steel
Protection layer

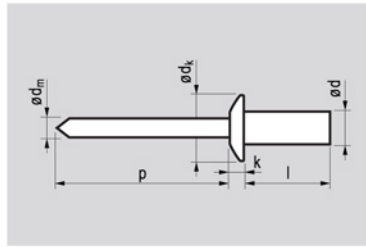

closed end | dome head

Ø d	l		Item nr.	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	6,5	0,5-1,5	12513206						
[+0,08/-0,10]	8,0	1,5-3,0	3208						
	9,5	2,5-4,5	3209	6,0	≤1,4	~1,70	≥27	1.300	850
Ø 3,3	12,5	4,5-7,5	3212						
4,0	8,0	0,5-2,0	12514008						
[+0,08/-0,10]	10,0	2,0-4,0	4010	8,0	≤1,7	~2,18	≥27	2.000	1.350
Ø 4,1									
4,8	9,5	1,0-2,5	12514809						
[+0,08/-0,10]	11,5	2,5-4,5	4811	9,5	≤2,0	~2,63	≥27	2.800	1.950
Ø 4,9									



Blind rivets