





Copper
Polished



Steel
Zinc plated

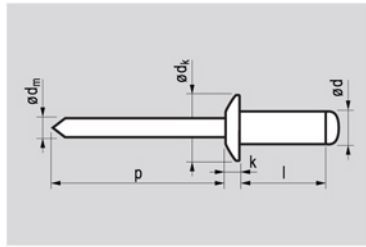

open type | dome head

Ø d	l		Item nr.	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,0	6,0	1,0-3,0	11013006						
[+0,08/-0,10]	8,0	3,0-5,0	3008	6,5	0,8	~1,75	≥27	700	600
	10,0	5,0-7,0	3010	[+0/-0,7]	[+/-0,2]				
Ø 3,1	12,0	7,0-9,0	3012						
3,2	6,0	1,0-3,0	11013206						
[+0,08/-0,10]	8,0	3,0-5,0	3208	6,5	0,8	~1,95	≥27	800	700
	10,0	5,0-7,0	3210	[+0/-0,7]	[+/-0,2]				
Ø 3,3	12,0	7,0-9,0	3212						
4,0	6,0	1,0-2,5	11014006						
[+0,08/-0,15]	8,0	2,5-4,5	4008						
	10,0	4,5-6,5	4010	8,0	1,0	~2,10	≥27	1.500	1.000
Ø 4,1	12,0	6,5-8,5	4012	[+0/-1,0]	[+/-0,3]				
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
4,8	8,0	1,5-3,5	11014808						
[+0,08/-0,15]	10,0	3,5-5,5	4810						
	12,0	5,5-7,5	4812	9,5	1,1	~2,70	≥27	2.000	1.500
Ø 4,9	14,0	7,5-9,5	4814	[+0/-1,0]	[+/-0,3]				
	16,0	9,5-11,5	4816						



Blind rivets