





Aluminium [AlMg2,5/3,5]

Polished



Steel

Zinc plated

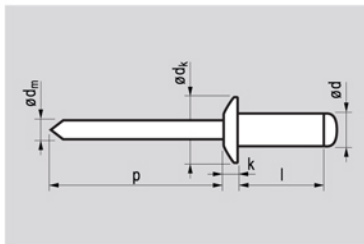

open type | dome head

Ø d	l		Item nr.	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
2,4	4,0	~2,0	10312404						
[+0,08/-0,10]	6,0	2,0-4,0	2406	5,0	0,7	~1,45	≥27	355	315
	8,0	4,0-6,0	2408	[+0/-0,7]	[+/-0,15]				
Ø 2,5	10,0	6,0-8,0	2410						
3,0	4,0	~1,5	10313004						
[+0,08/-0,10]	6,0	1,5-3,5	3006						
	8,0	3,5-5,5	3008						
Ø 3,1	10,0	5,5-7,5	3010	6,5	0,8	~1,75	≥27	810	620
	12,0	7,5-9,5	3012	[+0/-0,7]	[+/-0,2]				
	14,0	9,5-11,5	3014						
	16,0	11,5-13,5	3016						
3,2	4,0	~1,5	10313204						
[+0,08/-0,10]	6,0	1,5-3,5	3206						
	8,0	3,5-5,5	3208						
Ø 3,3	10,0	5,5-7,5	3210	6,5	0,8	~1,75	≥27	980	760
	12,0	7,5-9,5	3212	[+0/-0,7]	[+/-0,2]				
	14,0	9,5-11,5	3214						
	16,0	11,5-13,5	3216						
	18,0	13,5-15,5	3218						
	20,0	15,5-17,5	3220						
4,0	6,0	1,5-3,0	10314006						
[+0,08/-0,15]	8,0	3,0-5,0	4008						
	10,0	5,0-6,5	4010						
Ø 4,1	12,0	6,5-8,5	4012	8,0	1,0	~2,10	≥27	1.600	1.200
	14,0	8,5-10,5	4014	[+0/-1,0]	[+/-0,3]				
	16,0	10,5-12,5	4016						
	18,0	12,5-14,5	4018						
	20,0	14,5-16,5	4020						
	23,0	16,5-19,0	4023						
	25,0	19,0-21,5	4025						



Blind rivets